

KARNAK
THE SEAL OF QUALITY



502 RC-W Elasto-Kote

SOLVENT BASED SEBS RUBBER ROOF COATING

Karnak #502 RC-W Elasto-Kote is a highly elastic solvent based single component exterior waterproof coating. Elasto-Kote can be applied over properly prepared metal, EPDM, spray foam and aged single ply membranes including TPO, PVC & Hypalon to restore and prolong the life of existing roof systems. 502 Performs exceptionally well in ponding water areas and exhibits excellent color stability, weatherability and flexibility. Karnak's #502 RC-W Elasto-Kote system includes Karna-Flex Seam Sealer for repairs and details, 502BP Self-Priming Base Coat & 502 RC-W Elastomeric Finish Coat, the base coat is light gray to provide easy application of the white finish coat. Elasto-Kote has CRRC, Energy Star, FM & UL ratings.



502 Elasto-Kote Benefits...

- Solvent Based SEBS Rubber Coating
- Excellent performance in ponding water areas
- Easy to apply by brush, roller or spray equipment
- Adhesion to most roof surfaces
- 650% Elongation
- Superior low temp flexibility
- Permeability: 0.01 perms
- Single component

Surface Prep & Application:

- Clean roof 799 Wash-N-Prep or *#507 for EPDM*
- Seal seams, penetrations, repairs with Karna-Flex
- Apply #502 Self Priming Base at 1.5-Gal / 100 Sq. Ft.
- Allow base coat to cure 24 hours
- Apply #502 Elasto-Kote Finish at 1.5-Gal / 100 Sq. Ft.
- Adhesion tests recommended before application

*Contact Karnak Technical Services for complete scope of work




Available Packaging: 5 Gal | 55 Gal

KARNAK Corporation | 800-526-4236 | www.KARNAKcorp.com

Manufacturing Facilities: Clark, NJ | Kingman, AZ | Broadview, IL | Ft. Lauderdale, FL
Renton, WA | Rancho Cucamonga, CA | Dallas, TX



502 RC-W Elasto-Kote Application Guide

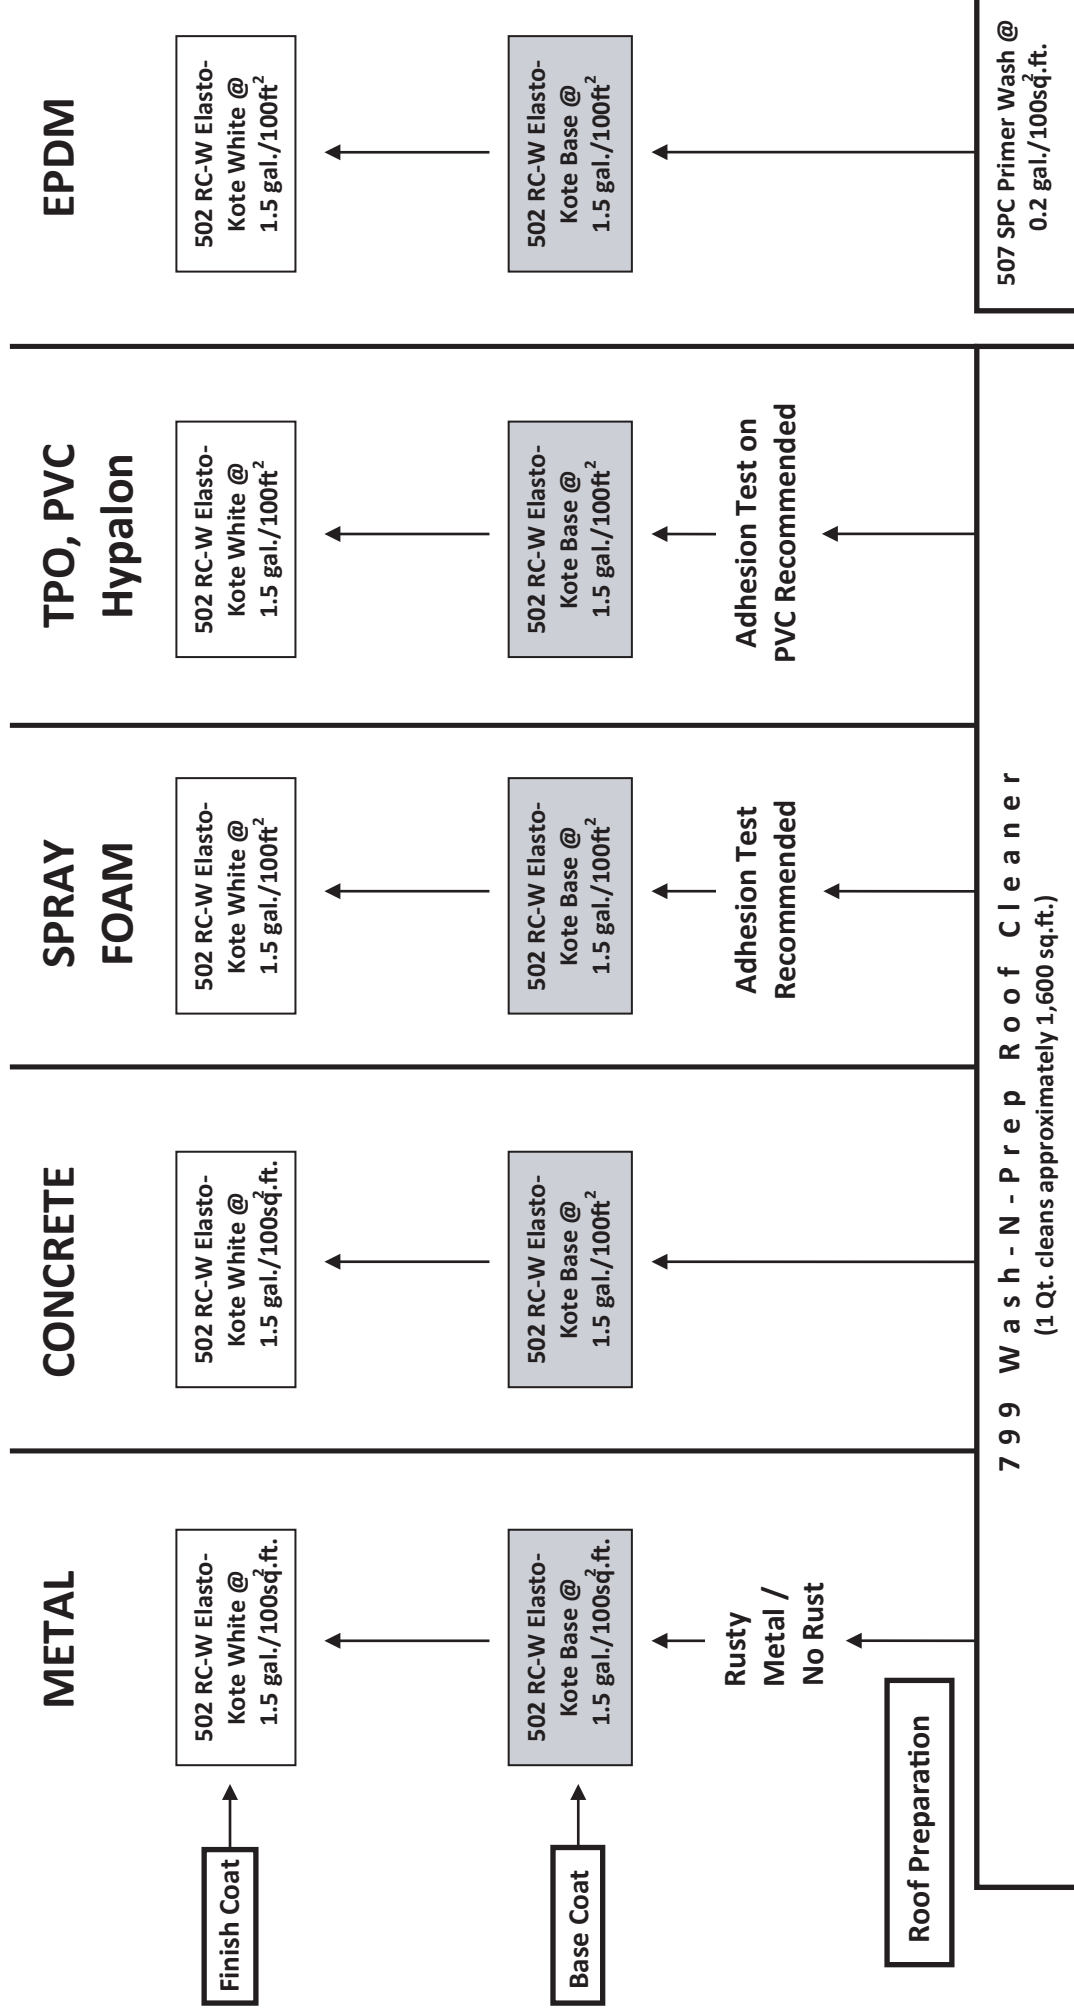

Karnak #502 RC-W Elasto-Kote is an SEBS Rubber highly elastic solvent based single component exterior waterproof coating. The coating has excellent color stability, weatherability and flexibility. Karnak #502 RC-W Elasto Kote has outstanding surface appearance and durability against salt spray, acid rain and ultra-violet sunlight. #502 Elasto-Kote is available in 5 gallon pails and 55 gallon drums and can be brush, roll or spray applied. For additional information and specifications please contact Karnak's technical department.